




Aluminium windows & doors

THE ULTIMATE EUROPEAN QUALITY

DOOR SYSTEMS

SCHÜCO

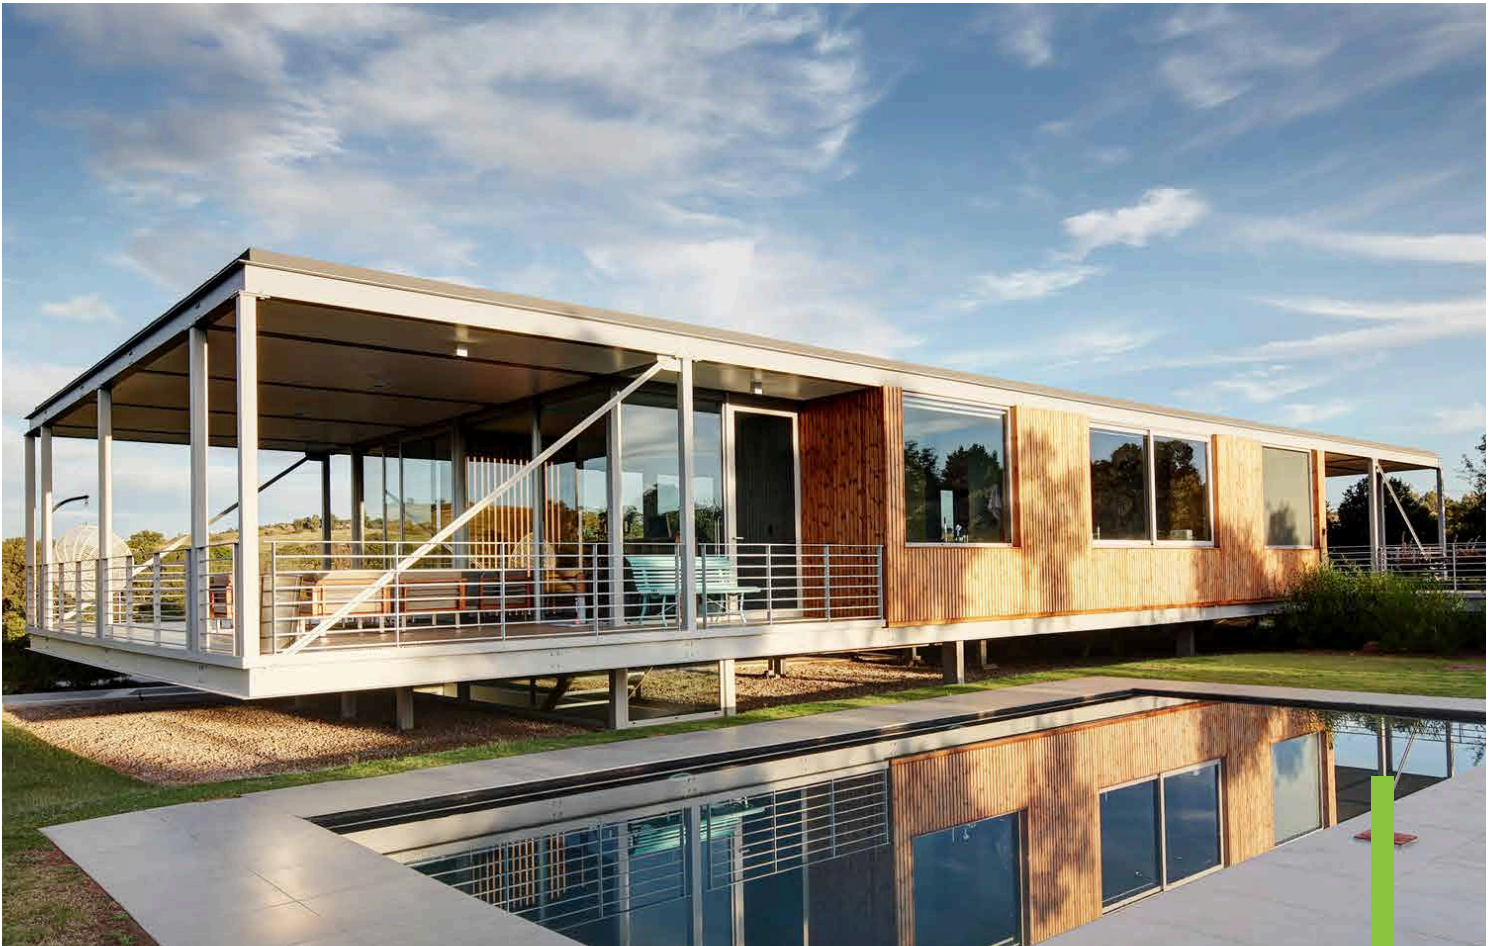

ACCESS OUR WORLD OF LUXURY

ATE EUROPEAN QUALITY
RIVE FOR PERFECTION
↓ ALUMINIUM SYSTEMS
ATE EUROPEAN QUALITY
RIVE FOR PERFECTION
↓ ALUMINIUM SYSTEMS
ATE EUROPEAN QUALITY
RIVE FOR PERFECTION

INNOVATIVE - CERTIFIED EUROPEAN ALUMINIUM SYSTEMS
PREMIUM QUALITY - LUXURY - ULTIMATE EUROPEAN QUALITY
THE HOME OF EXCELLENCE - STRIVE FOR PERFECTION
INNOVATIVE - CERTIFIED EUROPEAN ALUMINIUM SYSTEMS
PREMIUM QUALITY - LUXURY - ULTIMATE EUROPEAN QUALITY
THE HOME OF EXCELLENCE - STRIVE FOR PERFECTION
INNOVATIVE - CERTIFIED EUROPEAN ALUMINIUM SYSTEMS
PREMIUM QUALITY - LUXURY - ULTIMATE EUROPEAN QUALITY
THE HOME OF EXCELLENCE - STRIVE FOR PERFECTION
INNOVATIVE - CERTIFIED EUROPEAN ALUMINIUM SYSTEMS
PREMIUM QUALITY - LUXURY - ULTIMATE EUROPEAN QUALITY
THE HOME OF EXCELLENCE - STRIVE FOR PERFECTION

INNOVATIVE - CERTIF
PREMIUM QUALITY - LI
THE HOME OF EXCE
INNOVATIVE - CERTIF
PREMIUM QUALITY - LI



Aluminium windows & doors





Our elite German engineering team meticulously crafts our certified European hinge doors and pivot doors, taking into account every aspect of your home's primary access point – YOUR ENTRANCE. From aesthetics to safety, this system consistently delivers, featuring robust accessories that enable the pivot door to support up to 250kg and a five-point locking mechanism to ensure peace of mind during the night. With our innovative aluminum systems, you can maximize the influx of natural light as you design the entrance of your dreams.




HINGE DOOR

TECHNICAL CHARACTERISTICS

- Casement of system 50mm
- Basic width of frame and sash 141mm
- Glass thickness 6mm - 32mm
- Maximum weight of sash 120kg

TYOLOGIES GUIDE




PIVOT DOOR


TECHNICAL CHARACTERISTICS

- Casement of system 50mm
- Basic width of frame and sash 168mm
- Glass thickness 6mm - 32mm
- Maximum weight of sash 250kg


PIVOT DOOR THRESHOLD

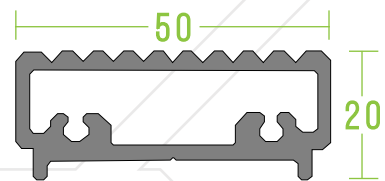

OUTWARD OPENING THRESHOLD FOR HINGE DOOR



INWARD OPENING THRESHOLD FOR HINGE DOOR



CERTIFICATES FOR HINGE/PIVOT DOOR

Air permeability DIN EN 12207 Class 2

Windload resistance DIN EN 12210 Class C3

Burglar resistance DIN EN 1627 RC2


WE ARE THE BENCHMARK



OUR VISION IS TO



- Be the benchmark against which innovation, quality and style the industry is measured
- Be the best by far at what we do
- Produce the highest quality from start to finish

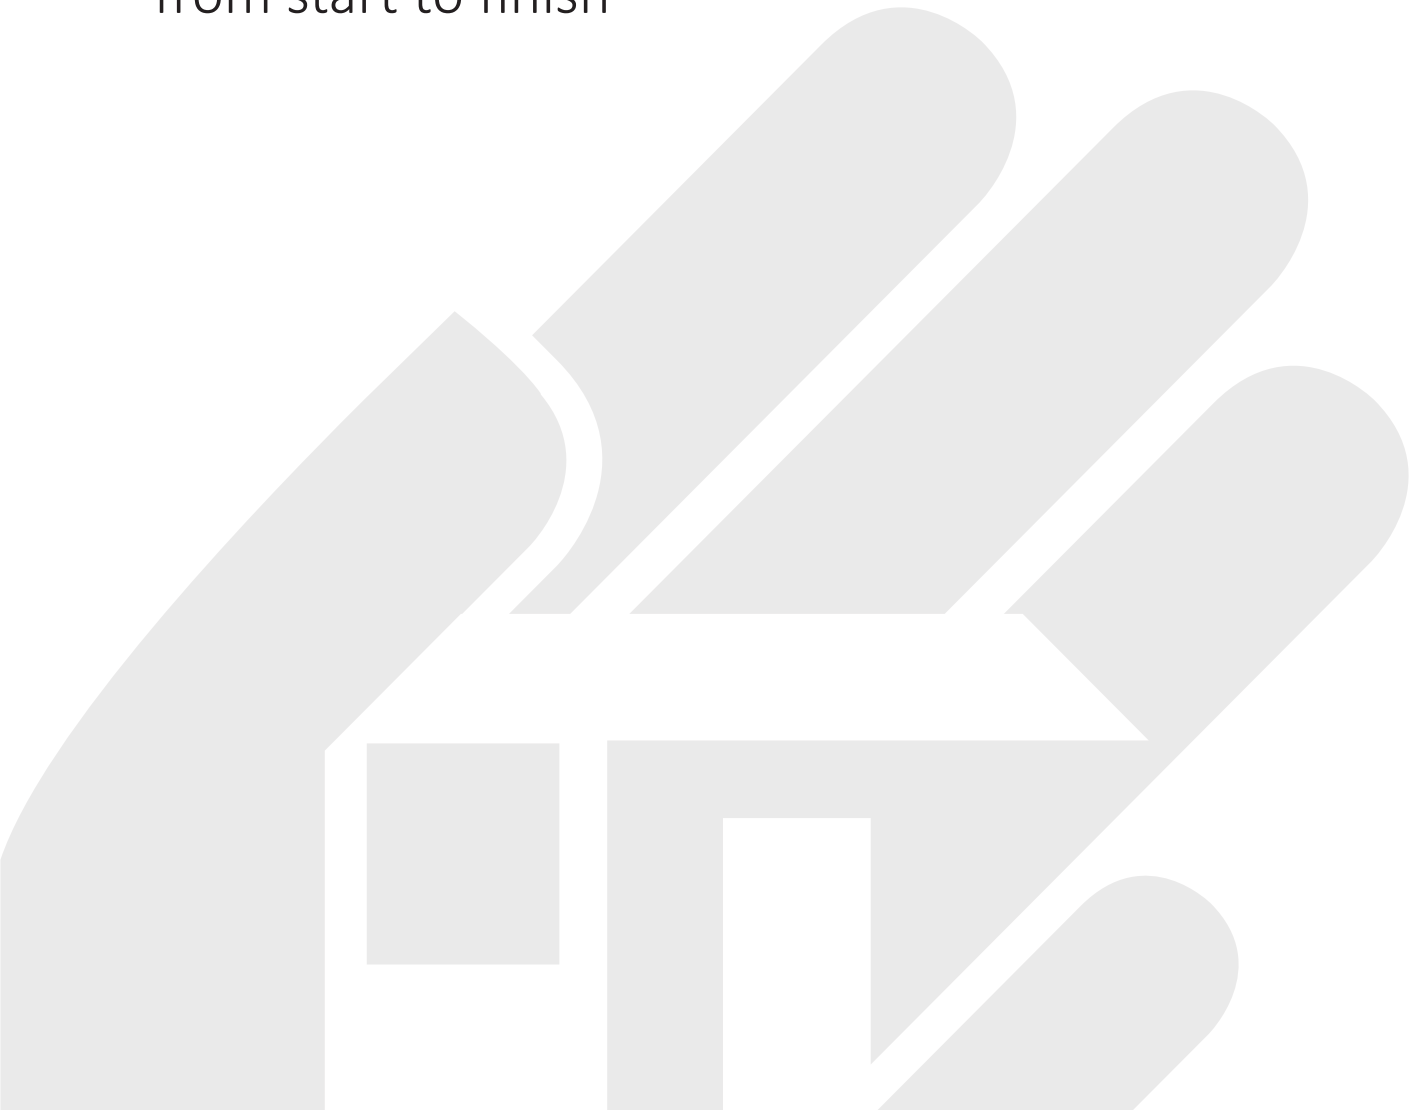



VISIT OUR SHOWROOMS

JOHANNESBURG

37 Old Kilcullen Road, Bryanston
Johannesburg
T: 011 796 5165
www.fenster.co.za
info@fenster.co.za

GEORGE

52 York Street, George
Western Cape
T: 044 220 4444
www.fenster.co.za
info@fenster.co.za

CAPE TOWN

62 Marine Drive, (Service Road), Paarden Eiland
Cape Town
T: 021 510 0921
www.fenster.co.za
info@fenster.co.za